




ol/k

cold chamber
aluminum

cold chamber
magnesium

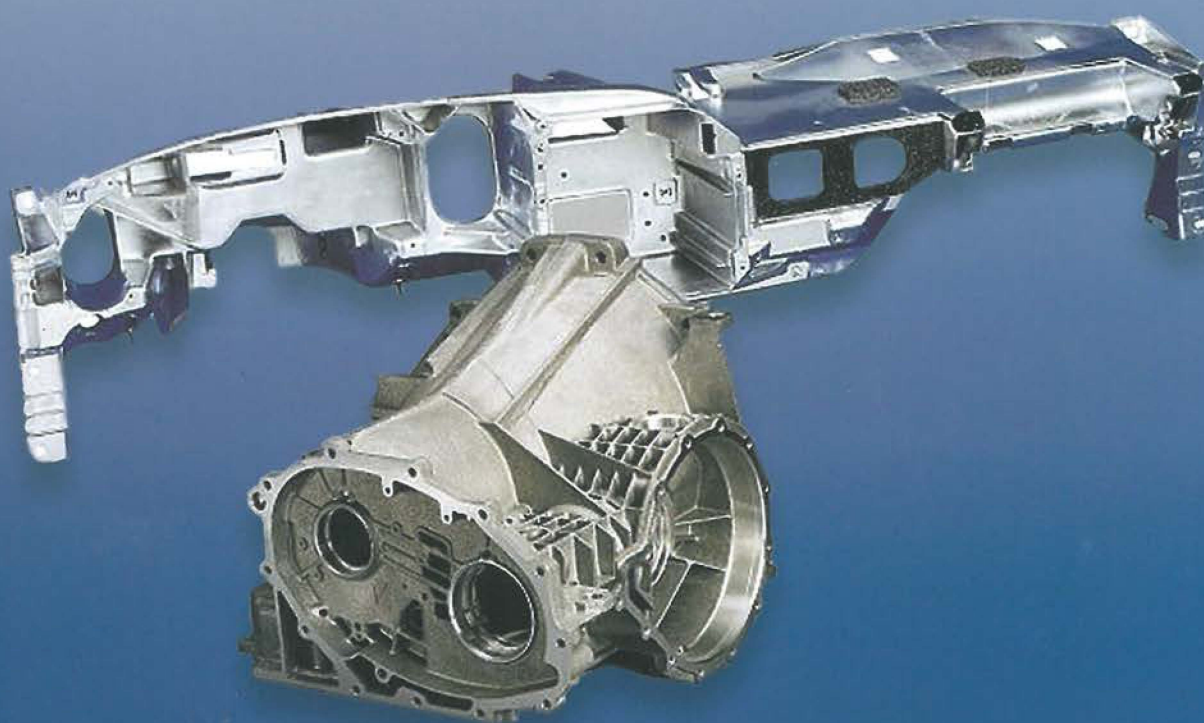

features

- ◆ 2-toggle clamp mechanism
- ◆ Adjustable closing stroke
- ◆ Long die stroke for part extraction
- ◆ Cast rear plate with integrated linkage connection
- ◆ 3-phase injection
- ◆ Hydraulic center ejection
- ◆ Rugged base construction
- ◆ Electric servo drive safety doors

options

- ◆ Servo shot control
- ◆ Tie bar pull
- ◆ Die carrier
- ◆ Auto die clamp

machine specifications

Cold Chamber – Aluminum, Magnesium

OL/K

MACHINE MODEL	RATED TONNAGE AVAILABLE	TIE BAR DIAMETER	SPACE BETWEEN BARS	DIE THICKNESS RANGE	DIE STROKE	MACHINE WEIGHT	MOTOR HORSEPOWER	MACHINE DIMENSIONS	SHOT POSITIONS
	US Tons	Inches	Inches	Inches	Inches	Pounds	HP	Feet	Inches
OLK 252	275	3.5	19.2	7.0 - 21.6	19.7	21,900	20	17'x5'x7'	CL - 6.29
OLK 402	430	4.5	23.6	7.8 - 25.5	21.2	31,900	40	21'x5'x8'	CL - 7.08
OLK 502	540	5.1	27.5	9.8 - 27.5	23.6	40,700	40	21'x6'x8'	CL - 7.87
OLK 602	650	5.5	28.7	12.7 - 30.7	26.5	50,700	50	22'x6'x9'	CL - 10.63
OLK 702	770	5.9	29.9	13.7 - 33.4	30.1	61,700	50	25'x6'x10'	CL - 11.81
OLK 802	970	6.8	32.6	15.7 - 35.4	33.4	83,700	60	28'x6'x11'	CL - 11.81
OLK 1002	1210	7.5	37.4	17.7 - 41.3	37.7	110,200	100	31'x8'x12'	CL - 13.38
OL 1300	1490	8.4	40.1	17.7 - 43.3	42.1	161,000	100	31'x8'x13'	CL - 17.71
OL 1500	1650	9.25	43.3	17.7 - 47.2	47.2	181,000	100	35'x9'x14'	CL - 17.71
OL 1750	1980	9.8	45.2	21.6 - 55.1	47.2	210,000	125	37'x10'x14'	CL - 17.71
OL 2200	2536	11.2	50.2	21.6 - 59	55.1	253,000	150	42'x11'x14'	CL - 19.68
OL 2500	2750	11.2	55.5	25.6 - 63	59	370,000	150	45'x11'x16'	CL - 19.68
OL 2700	3075	11.8	64.2	25.6 - 63	59	480,000	200	46'x13'x15'	CL - 19.68
OL 3200	3650	13	67	40 - 78.7	59	529,000	250	54'x13'x16'	CL - 19.68
OL 4000	4350	13.4	70.1	47.2 - 82.7	63	585,000	250	55'x13'x18'	CL - 19.68
OL 4500	5050	14.6	68.9	35.4 - 78.7	70.9	618,000	250	61'x13'x18'	CL - 23.6



IdraPrince / www.idraprince.com

IdraPrince Incorporated, 670 Windcrest Drive, Holland, MI 49423, USA
Tel: 616.394.8248 / Fax: 616.394.1250 / Email: info@idraprince.com