

P200XL

Pressurised-water temperature control unit up to 392 °F

- Control system RT200
- Pump with high flow rate: 52.8 GPM
- Low-scale cooling system "SK"
- Pressure control
- Solid-state relay instead of heating contactor



Technical specifications

Heat transfer medium	Outlet temperature	Heating capacity at 400V	Cooling capacity	Pump capacity/Type		
Water	392 °F	20 / 40 / 60 kW	374 °F 177 kW	SM85H	52.8 GPM	3.5 kW
				PM85H	52.8 GPM	4.0 kW

Technical data

Outlet temperature			
max.	°F	392	
Heat transfer medium		Water	
Filling quantity	Gal	2.6	
Expansion volume	Gal	1.3	
Heating capacity at 400V	kW	20 / 40 / 60	
Cooling capacity	kW	177	
Cooler		SK	
at outlet temperature	°F	374	
at cooling water temperature	°F	68	
Pump capacity/Type		SM85H	PM85H
Flow rate max.	GPM	52.8	52.8
Power consumption	kW	3.5	4.0
Pressure max.	psi	116	116
Control system		RT100 / RT200	
Measuring mode (standard)		Pt100	
Operating voltage	V/Hz	200-600 V, 50/60 Hz	
Connections			
Outlet/Inlet		G1 1/2"IG	
Cooling water mains		G3/4"	
Degree of protection		IP54	
Dimensions W/H/D	in	17.01/53.15/61.18	
Weight	lb	584.33	
Color	RAL	9006/7016	
Ambient temperature			
max.	°F	104	
Noise level	db (A)	< 70	


Standard equipment

- Solid-state relay (SSR) instead of heating contactor
- Hand valve in inlet and outlet
- Water circuit of non-rusting materials
- Automatic water refill
- Filter in the main circuit
- Filter in cooling water circuit
- Leak-free pump
- Patented low-scale cooling system (SK)
- Pressure gauge outlet
- Pressure gauge for system pressure
- Unit in IP54 protection degree
- RT200 control system


Options

- Electronic flow measurement
- Pump PM85H only with frequency converter
- RT100 control system

Pump curve

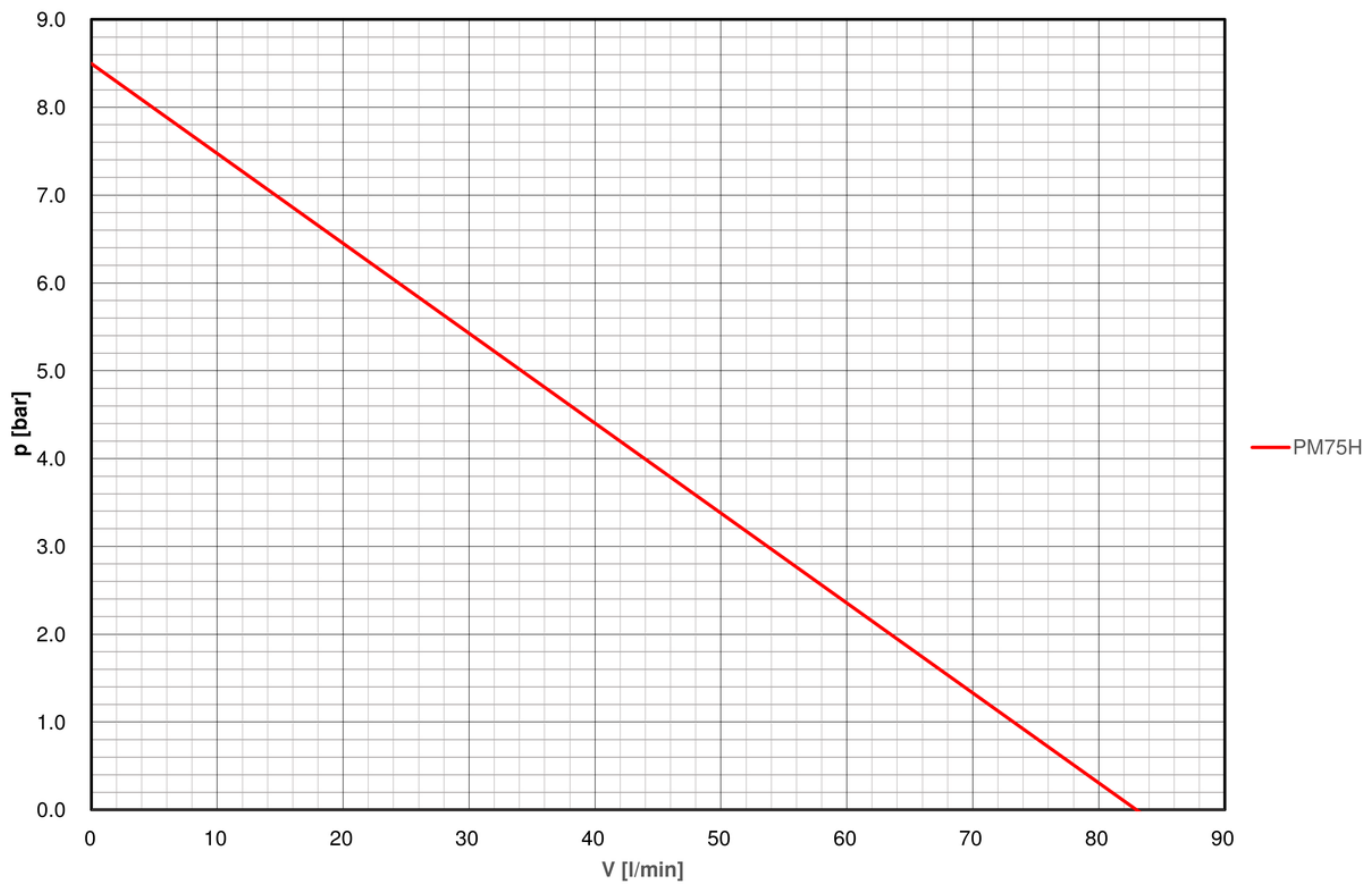

Cooling curve

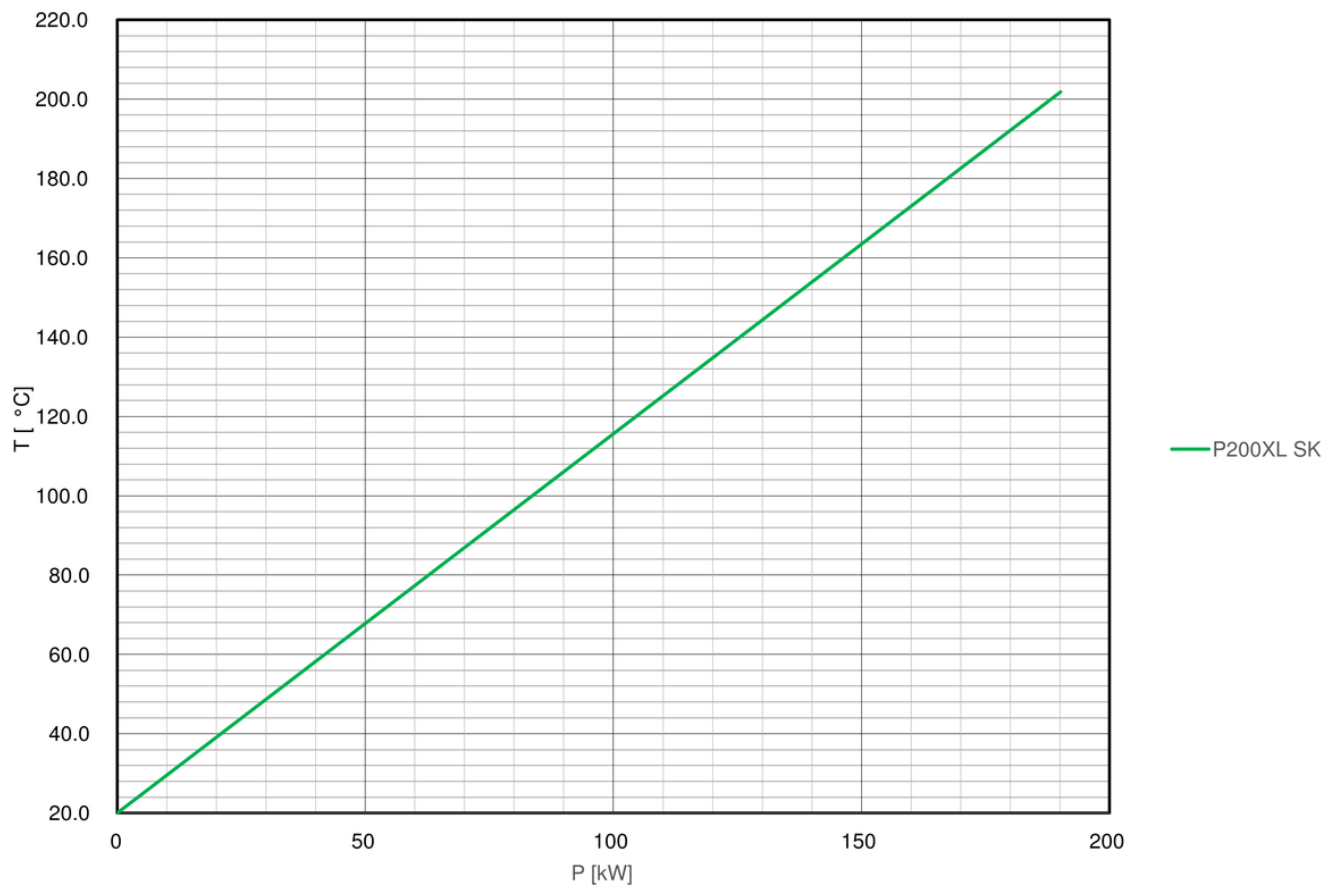

Representation United States

Injection Molding, Die Casting, other Applications

Regloplas Corporation
4063 Tabor Road
Sodus, MI 49126
United States

Tel + 1 888 799 4110
Email info@regloplasusa.com