

Die Cast Machinery, LLC Inventory number: DCM-5987

We offer for sale, subject to availability, prior sale and the terms listed below:

Used Die Pro Model: Core Cool 3.3.15 100 KW (25KW Per Zone) Dual (two) Zone Portable Refrigerated Water Chiller Temperature Control Unit

Status:	Available
Manufacturer:	Die Pro
Model:	Core Cool 3.3.15
Size:	100 KW (25KW Per Zone)
Inventory Number:	DCM-5987

Die Pro - Core Cool 3.3.15 100 KW (25KW Per Zone) Dual (two) Zone Portable Refrigerated Water Chiller Temperature Control Unit, Allen-Bradley PLC/Touch Panel Controls

[View this machine online: DCM-5987](#)



Specifications

	U.S. Standard	Metric
Main Cooling Power (Zone #1-4):	100 kW	100 kW
Pump Motor Size (Zone #1-4):	5 HP	3.68 kW
Flow Rate (Zone #1-4):	15 gallons per minute	57 liters per minute
Connection size/type (Zone #1-4):	3/4 inch NPT	1.81 mm NPT
Maximum Operating Temperature:	430 degrees F	221 degrees C
Power Requirements:	480 volt / 3 phase / 60 cycle	480 volt / 3 phase / 60 cycle
Overall Size (L x W x H):	50 x 24 x 50 inches	1270 x 610 x 1270 mm
Weight:	750 Pounds	340 kg

Features & Accessories:

- NEW IN 2022
- ALLEN BRADLEY COMPACT LOGIX CONTROL SYSTEM.
- COOLING PUMP OUTPUT RATING IN P.S.I. (BAR) – 300 (20).
- NETWORK COMMUNICATION PROTOCOLS. (ETHERNET/IP, PROFINET, PROFIBUS, CC LINK, MODBUS, DEVICENET, DH+, SERIAL) VIA GATEWAY MODULE.
- NEMA TYPE POWER CONTROL CABINET FOR OPERATION WITH INPUT VOLTAGE 480 VOLT 60 Hz 3 PHASE.
- 316 SS PIPE FITTINGS.
- COOLING SYSTEM TANK CAPACITY. (52.5 GALLONS) (198.7 LITERS)

Terms of Sale:

Price: [request quotation](#)

Shipping Terms: Ex-works

Questions? Call (847) 360-9170 and mention DCM-5987.

Photos - DCM-5987

Click any photo to open it full size on our website.




[Photo 1 of DCM-5987 - view online](#)



[Photo 2 of DCM-5987 - view online](#)



[Photo 3 of DCM-5987 - view online](#)

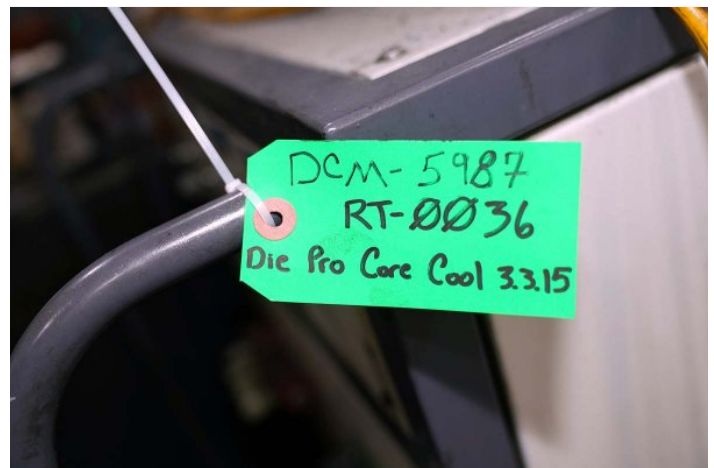

[Photo 4 of DCM-5987 - view online](#)



[Photo 5 of DCM-5987 - view online](#)

Description:

Used, Die Pro Model Core Cool 3.3.15 100 KW (25KW Per Zone) Dual (two) Zone Portable Refrigerated Water Chiller Temperature Control Unit For_Sale, Features Include: ALLEN BRADLEY COMPACT LOGIX CONTROL SYSTEM., COOLING PUMP OUTPUT RATING IN P.S.I. (BAR) – 300 (20)., NETWORK COMMUNICATION PROTOCOLS. (ETHERNET/IP, PROFINET, PROFIBUS, CC LINK, MODBUS, DEVICENET, DH+, SERIAL) VIA GATEWAY MODULE., NEMA TYPE POWER CONTROL CABINET FOR OPERATION WITH INPUT VOLTAGE 480 VOLT 60 Hz 3 PHASE., 316 SS PIPE FITTINGS., COOLING SYSTEM TANK CAPACITY. (52.5 GALLONS) (198.7 LITERS), Allen-Bradley PLC/Touch Panel controls, second Hand, DCM-5987

PURCHASER'S (Buyer's) RESPONSIBILITY AND INDEMNITY: Used machines, equipment or any part thereof, may not incorporate approved activating mechanisms, operator safety devices or safety guards as required by OSHA or otherwise. It shall be a Purchaser's (Buyer's) responsibility to ensure that any and all merchandise or equipment purchased from Die Cast Machinery, LLC or its affiliates is installed and operated in a proper and safe manner. Purchaser (Buyer) also acknowledges that it may have to install or change guards, safeties, warnings or other components to ensure that the merchandise or machines purchased will conform to all laws, codes, regulations, ordinances, statutes, insurance requirements and industry standards. Purchaser agrees to defend, indemnify and hold harmless Die Cast Machinery, LLC from and against all suits, claims, costs, damages and expenses, including, but not limited to, reasonable attorneys' fees, arising out of, or in connection with, the transportation, purchase, ownership, or use of the merchandise or equipment sold hereunder. Information has been obtained from sources deemed reliable, buyers should avail themselves of the opportunity to inspect the items before purchase.